UPDATE S'PHONE QC50

1.1 Install SP Flash Tool

Download the software on the link below: <u>www.storex.fr/download/fw/SP_Flash_Tool_v5.rar</u> Unzip the file on your computer, you should have a folder named « **SP Flash Tool V5** ».

1.2 Install Universal ADB drivers

Download the S'Phone drivers on the link below: <u>www.storex.fr/download/fw/UniversalAdbDriverSetup.msi</u> <u>www.storex.fr/download/fw/MT65XX USB VCOM drivers.rar</u> Install driver and select « **Next** » until the end of installation.

1.3 Download the update file

Download the update file on the link below, then unzip the file on your PC. You should have a folder named **S'Phone_QC50_20141024** »:

www.storex.fr/download/fw/S'Phone QC50 20141024.rar


Launch « **SP Flash Tool** », just click twice on the « **flash_tool.exe** » file, contained on « **SP Flash Tool** » folder.

download_scene.ini	19/07/2013 15:04
😸 flash_tool.exe	26/12/2013 12:36
flashtool.qch	17/11/2013 14:50

2 Install the update (ROM)

Click on « **Scatter-loading** » then navigate to MT65xx_Android_scatter_emmc.txt file contained in « **S'Phone_QC50_20141024** » folder.

Ignore advertisement message

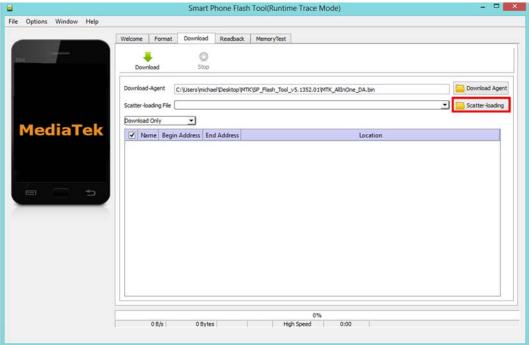

Select the file below then click on « Open ».

🚱 logo.bin	23/07/2014 16:40	Fichier BIN
MBR	23/07/2014 16:40	Fichier
MT6572_Android_scatter.txt	23/07/2014 16:40	Document texte
🚱 preloader_ratech72_wet_rlk_jb3.bin	23/07/2014 16:40	Fichier BIN

The windows below should appear.

8		Smart Phone	Flash Tool(Runtim	e Trace Mode)	- 🗆 🗙				
File Options Window Help									
Welcome	Format	Download Read	back MemoryTest						
	Vectorie Polinez Dominodo Readdeux Menico yest								
Dow	Download Stop								
Downloa	Download-Agent C:{Users\michael\Desktop\MTK\\$P_Flash_Tool_v5.1352.01\MTK_AllinOne_DA.bin								
Scatter-I	loading File	C: \Users\michael\Deskto	op\S'Phone\S'Phone_DC:	35G_20140724\MT6572_Android_scatter.txt	Scatter-loading				
	ad Only	•							
MT6572	Name	Begin Address	End Address	Location					
PF	RELOADER	0x00000000000000000	0x000000000018caf	C:\Users\michael\Desktop\S'Phone\S'Phone_DC35G_20140	724\preloader_r				
м м	IBR	0x000000000c00000	0x000000000c001ff	C:\Users\michael\Desktop\S'Phone\S'Phone_DC35G_20140	724\MBR				
EE EE	BR1	0x00000000c80000	0x000000000c801ff	C:\Users\michael\Desktop\S'Phone\S'Phone_DC35G_20140	724\EBR1				
UI	BOOT	0x000000002920000	0x00000000295cabb	C:\Users\michael\Desktop\S'Phone\S'Phone_DC35G_20140	724\lk.bin				
	OOTIMG	0x000000002980000	0x000000002df57ff	C:\Users\michael\Desktop\S'Phone\S'Phone_DC35G_20140	724\boot.img				
	ECOVERY	0x000000002f80000	0x0000000034757ff	C:\Users\michael\Desktop\S'Phone\S'Phone_DC35G_20140	724\recovery.img				
	_	0x000000003580000		C:\Users\michael\Desktop\S'Phone\S'Phone_DC35G_20140					
				C:\Users\michael\Desktop\S'Phone\S'Phone_DC35G_20140					
				C:\Users\michael\Desktop\S'Phone\S'Phone_DC35G_20140					
				C:\Users\michael\Desktop\S'Phone\S'Phone_DC35G_20140					
V	SRDATA	0x000000004db40000	0x00000004f24a237	C:\Users\michael\Desktop\S'Phone\S'Phone_DC35G_20140	724\userdata.img				
	0 B/s	0 Bytes	EMMC Hig	h Speed 0:00 USB: DA Download All(high speed	,auto detect)				

Click on « **Download** ».

	Welco	ne Format	Download Read	dback MemoryTest		
		Download	© Stop			
	Download-Agent		C:\Users\michael\Desk	🚞 Download Agent		
	Scatt	er-loading File	C:\Users\michael\Deskt	op\S'Phone\S'Phone_DC	35G_20140724\MT6572_Android_scatter.txt	Scatter-loading
	Dow	load Only	-			
MT6572		Name	Begin Address	End Address	Location	
		PRELOADER	0x0000000000000000000000000000000000000	0x000000000018caf	C:\Users\michael\Desktop\S'Phone\S'Phone_DC35G_20140	724\preloader_r
	~	MBR	0x000000000c00000	0x000000000c001ff	C:\Users\michael\Desktop\S'Phone\S'Phone_DC35G_20140	724\MBR
		EBR1	0x000000000c80000	0x000000000c801ff	C:\Users\michael\Desktop\S'Phone\S'Phone_DC35G_20140	724\EBR1
	~	UBOOT	0x000000002920000	0x00000000295cabb	C:\Users\michael\Desktop\S'Phone\S'Phone_DC35G_20140	724\lk.bin
D		BOOTIMG	0x000000002980000	0x000000002df57ff	C:\Users\michael\Desktop\S'Phone\S'Phone_DC35G_20140	724\boot.img
_	•	RECOVERY	0x000000002f80000	0x0000000034757ff	C:\Users\michael\Desktop\S'Phone\S'Phone_DC35G_20140	724\recovery.img
		SEC_RO	0x000000003580000	0x0000000035a0fff	C:\Users\michael\Desktop\S'Phone\S'Phone_DC35G_20140	724\secro.img
	•	LOGO	0x00000003540000	0x00000000365b7cd	C:\Users\michael\Desktop\S'Phone\S'Phone_DC35G_20140	724\logo.bin
		ANDROID	0x000000004340000	0x00000001e61d527	C:\Users\michael\Desktop\S'Phone\S'Phone_DC35G_20140	724\system.img
	~	CACHE	0x000000036340000	0x000000036b3a0e7	C:\Users\michael\Desktop\S'Phone\S'Phone_DC35G_20140	724\cache.img
		USRDATA	0x00000004db40000	0x00000004f24a237	C:\Users\michael\Desktop\S'Phone\S'Phone_DC35G_20140	724\userdata.img

Connect you smartphone **powered off and battery out**, to your PC through USB.

The flashing process should begin. The progression bar appears in RED.

-	Welco	me Format	Download Reas	dback MemoryTest	8	
		nload-Agent			v5.1352.01/MTK_AllinOne_DA.bin 35G_20140724/WT6572_Android_scatter.txt v	Download Agent
		ter-loading File	C: Users (monder (Desk)	top is Phone is Phone_DC		Scatter-loading
MT6572		Name	Begin Address	End Address	Location	
	V	PRELOADER	0x0000000000000000000000000000000000000	0x000000000018caf	C:\Users\michael\Desktop\S'Phone\S'Phone_DC35G_2014	0724\preloader_r
· · · · · · · · · · · · · · · · · · ·	2	MEE		040000000006-00101	Cr. DearranichaeRD extrapt/Phone/SPhone, DC390, 2014	0724/MIR
	1	EBR1	0x0000000000c80000	0x000000000c801ff	C:\Users\michael\Desktop\S'Phone\S'Phone_DC35G_2014	0724\EBR1
■ → →	V V	BOOTIMG	0-0000000000000000000000000000000000000	0.00000000024528	C:\Users\michael\Desktop\S'Phone\S'Phone_DC35G_2014	07245 boot imp
	V	BIC OVERY	puerto processione	Concentration	College and the state of the set	Colores and Colores
		SEC_RO	0x000000003580000	0x0000000035a0fff	C:\Users\michael\Desktop\S'Phone\S'Phone_DC35G_2014	0724\secro.img
	2	1060	2000000000008-2000	Deconococococo de Test	Cit/Userranicham/Userstops/S Phone: 5 Phone: 002255 (2014)	1729) ogestere
	1	ANDROID	0x000000004340000	0x00000001e61d527	C:\Users\michael\Desktop\S'Phone\S'Phone_DC35G_2014	0724\system.img
	2	CACHE	040000000016540000	010000000000000000000000000000000000000	C/. Drawlinichaet/Delattip/CPhone/SPhone_DC356_2014	
	1	USRDATA	0x000000004db40000	0x000000004f24a237	C:\Users\michael\Desktop\S'Phone\S'Phone_DC35G_2014	0724\userdata.img

Then it changes to yellow.

				Smart Phone	Flash Tool(Runtin	ne Trace Mode)	
le Options W	indow Help						
		Welco	me Format	Download Rea	dback MemoryTest		
вм	_		Download	Stop			
		Dow	nload-Agent	C:\Users\michael\Desk	top/MTK\SP_Flash_Tool_	v5.1352.01\MTK_AllInOne_DA.bin	Download Agent
		Scat	ter-loading File	C:\Users\michael\Desk	top\S'Phone\S'Phone_DC	35G_20140724\MT6572_Android_scatter.txt	Scatter-loading
		Dow	nload Only	¥			
MT6	572		Name	Begin Address	End Address	Location	
		1	PRELOADER		0x000000000018caf	C:\Users\michael\Desktop\S'Phone\S'Phone_DC35G_2014)724\preloader_r
			MBR	0x000000000c00000	0x000000000c001ff	C:\Users\michael\Desktop\S'Phone\S'Phone_DC35G_2014)724\MBR
			EBR1	0x000000000c80000	0x000000000c801ff	C:\Users\michael\Desktop\S'Phone\S'Phone_DC35G_2014	
	b	2	BOOTIMG	0x000000002980000	0x000000002df57ff	C:\Users\michael\Desktop\S'Phone\S'Phone_DC35G_2014	724\boot.img
			SEC_RO	0x000000003580000	0x000000035a0fff	C\Users\michael\Desktop\S'Phone\S'Phone_DC35G_2014	0724\secro.img
Chip Info		V	1000	0.000000001340000		Editoria unichani Dechtos Stronovicy Phane, DC250, 2014	A CONTRACTOR OF
hip Name:	MT6572_S00	2	ANDROID	0.00000004340000	080000001e018527	C:\Users\michael\Desktop\S'Phone\S'Phone_DC35G_2014	
hip Version:	0x0000ca01		USRDATA	0x000000004db40000	0x000000004f24a237	C:\Users\michael\Desktop\S'Phone\S'Phone_DC35G_2014	
xt Clock:	EXT_26M						
xtern RAM Type:	DRAM						
xtern RAM Size:	0x20000000						
EMMC Flash			3.72M/s	78,89M		Download Flash 17% sh Speed 0:25 PreLoader USB VCOM Port (COM	<i>g)</i>
			3.727/5	19:934	i chine i ng	in speed i 0.25 (Precoader 050 VCOM Port (COM	0)

A window appear with an OK icon that indicate that the flashing process is over.



Unplug your smartphone then turn it on.

IMPORTANT HINT: If the flashing process do not begin with the **battery out** of the phone, please insert the battery and restart the flashing process. ALWAYS PHONE TURNED OFF.